


XQY-PS2-0.95/2.15-NE

精密高频功分/合路器

SN	Parameters	Specifications
1	频率范围 Frequency Range	950 ~ 2150 MHz
2	插入损耗 Insertion Loss	≤ 0.4 dB (Excluding theoretical loss 未含理论损耗 3.0 dB)
3	输入驻波 Input Port VSWR	Typ.1.15 / Max.1.2
4	输出驻波 Output Port VSWR	Typ.1.11 / Max.1.2
5	隔离度 Isolation	Typ.28dB / Min.20dB
6	幅度平衡 Amplitude Balance	≤ 0.2dB
7	相位平衡 Phase Balance	±2°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input / Output Connectors	N-Female
10	承受功率 Power Rating	Splitter 分路器用时 30W; Combiner 合路器用时 2W
11	工作温度 Operation Temperature	-35°C ~ +75°C
12	表面处理 Surface Finishing	Sandblasting natural color conductive oxide 喷砂本导
13	外形尺寸 Outline (mm)	46*56*20.5
14	馈电 Power Supply	DC24V 3A 直流电压从“Output 1”馈入，从“Input”馈出
15	重量 Weight	148 (g)

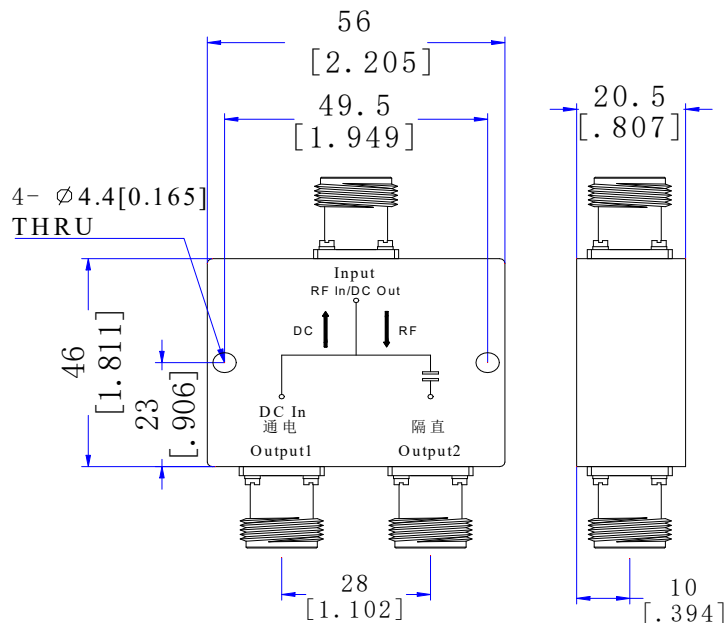

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)