


XQY-PS4-0.5/26.5-SEL

精密高频功分/合路器

precision RF power splitter/Combiner

参数/Parameters	规格/Specifications
频率范围 Frequency Range	500~26500 MHz
插入损耗 Insertion Loss	≤ 4.0dB (Excluding theoretical loss 未含理论损耗 6.0 dB)
输入驻波 Input Port VSWR	Typ.1.4 / Max.2.3
输出驻波 Output Port VSWR	Typ.1.3 / Max.1.8
隔离度 Isolation	≥ 11dB (500-800M) & 15dB (800-26500M)
幅度平衡 Amplitude Balance	±1.0dB
相位平衡 Phase Balance	±10°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	SMA-Female
承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
工作温度 Operation Temperature	-45°C ~ +85°C
表面处理 Surface Finishing	Black paint 黑色烤漆
外形尺寸 Outline Dimensions	143*68*10 (mm)
重量 Weight	280 (g)

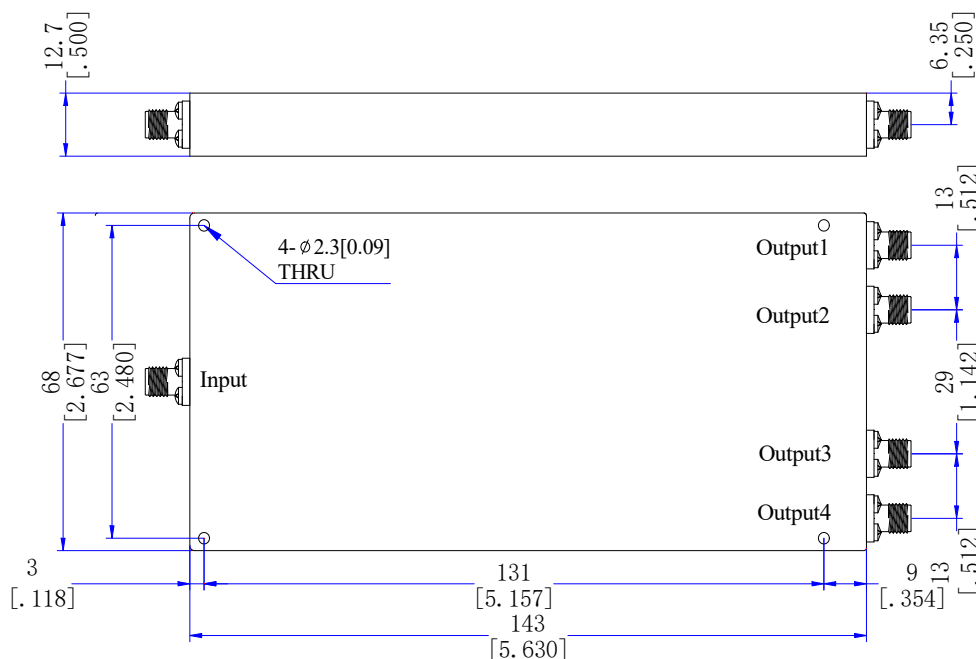

注: 尺寸(mm/[英寸]) , 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)