


## 射频同轴衰减器/ RF Coaxial Attenuator


### XQY-SMAJKS-08-2W

项目 Project	指标 Indicators
产品名称 Product Name	射频同轴衰减器/RF Coaxial Attenuator
频率范围 Frequency Range	DC-8 GHz
驻波比 VSWR	1.15:1 (max)
衰减值	1.2,3,4,5,6,7,8,9,10,12,15,20,30,40,50,60 dB
阻抗 Impedance	50 $\Omega$
功率 Power	2W
介质耐电压 Dielectric withstand voltage	1000 V
使用寿命 Service life	$\geq 500$
绝缘电阻 Insulation Resistance	$\geq 5000M\Omega$
A 接头类型 A connector type	SMA-Male
B 接头类型 B connector type	SMA-Female
工作温度 Operation Temperature	-55°C ~ +125°C
内导体材质 Inner conductor material	铍青铜 镀金 Beryllium bronze Gold plating
外导体材质 External conductor material	不锈钢 钝化 Stainless steel passivation
绝缘体 Insulator	PTFE

1-40dB 草图:

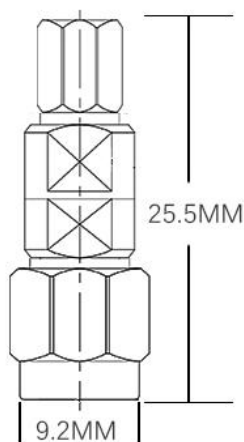

40-60dB 草图:

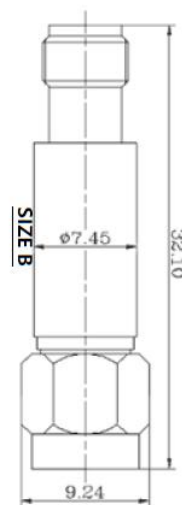

注: 尺寸(mm), 一般公差( $\pm 0.1$ )

Note: Dimensions (mm), General tolerance ( $\pm 0.1$ )